

GE75

Lubrication unit for FLUID GREASE NLGI 00-000 Single line system



Application

As an intermittent operation unit to feed volumetric dosing meters in single-line systems

Operation

It can be operated as follows:


- Without control device. Programmed from the machine's automation (plc, automaton, etc...)
- With control device (only with 3 litres tank)

In units with pressure switch, the pump's operation time is the pressure switch signal + 10 seconds.


Depending on the control system, they can be equipped with different accessories for monitoring and controlling the operation:

- Manual pushbutton (intermediate lubrication)
- Electrical level (minimum level control in the tank)
- Pressure gauge (visual control of the pressure cycle)
- Green light (voltage input / motor running)
- Red light (alarm or system fault)

Hydraulic diagram

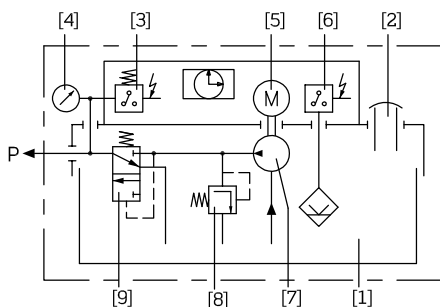

- | | |
|--------------------|----------------------------|
| 1- Tank | 6- Level switch |
| 2- Filling cap | 7- Gear pump |
| 3- Pressure switch | 8- Pressure limiting valve |
| 4- Pressure gauge | 9- Relief valve |
| 5- Electric motor | P = Pressure outlet |

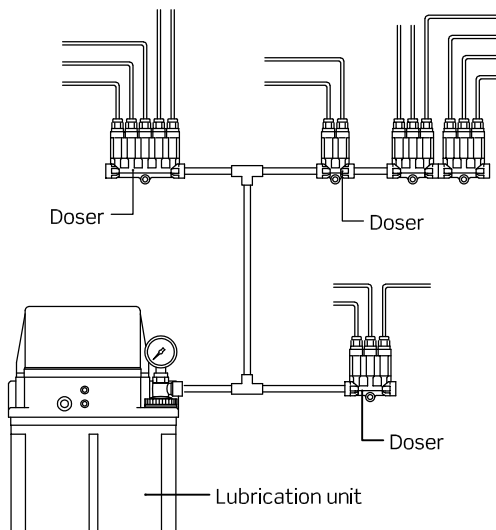

Technical characteristics

Tank.....2-3 litres in plastic
Degree of protection..... IP54

Gear pump

Lubricant Fluid Grease NLGI 00-000
Flow 0,1-0,2 l/min
Working pressure 40 bar
Working temperature..... +10°C ÷ +40°C

Motor

Voltage.....	115V~	230V~	24Vdc
Frequency	50/60Hz	50/60Hz	
Power (50Hz).....	115W	115W	55W
Consumption (50Hz).....	0,8A	0,5A	2,5A
rpm (50Hz).....	2800	2800	2800

Service mode.....S3 20%*
Maximum operation time..... 5 min
Maximum cycles/hour.....20


* 20% is the ratio between the operation time and the stop time.
E.g. 1 min of operation time corresponds to 5 min stop time

Pressure switch

Without pressure..... Open
Breakdown voltage..... 42V
Connection current..... 2,5A
Maximum contact load..... 30VA
Connection pressure.....14 bar


Electric level switch

Type of contact.....Capacitive sensor
Voltage..... 10 ÷ 30Vdc
Connection..... max. 220mA
Function opens with low lubricant level




Lubrication unit for FLUID GREASE
 NLGI 00-000
 Single line system

GE75/A
 2L Plastic

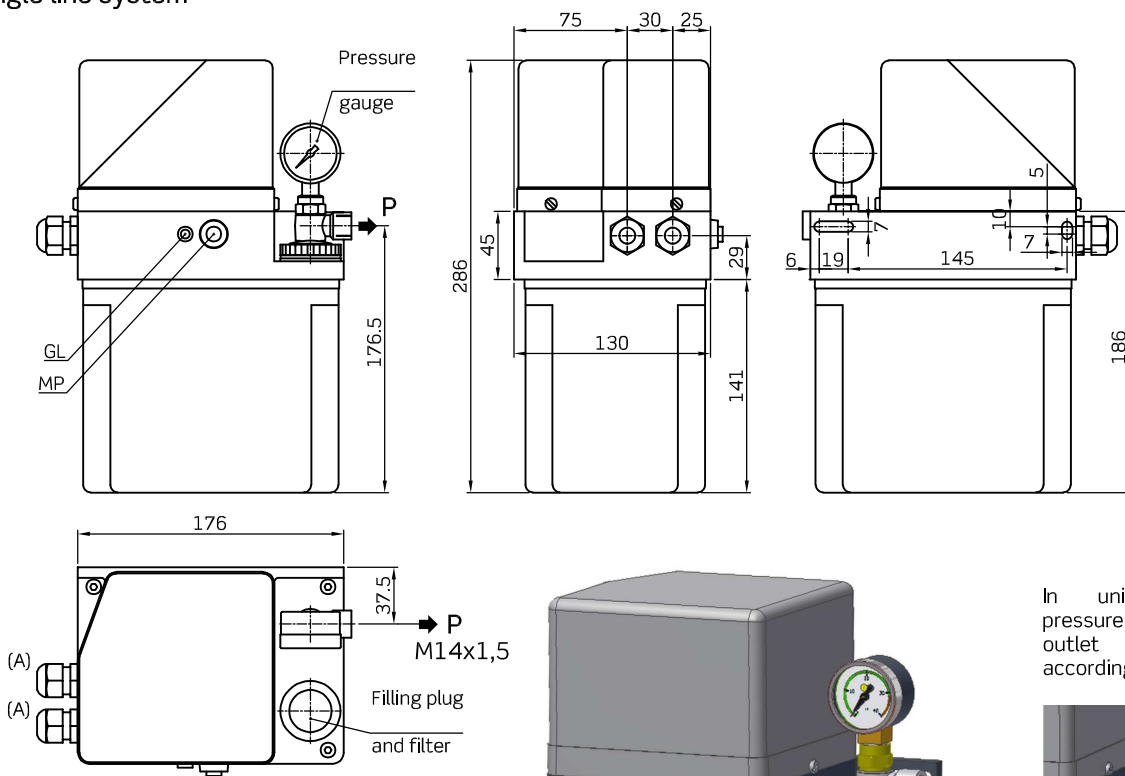

In units without pressure gauge, the outlet is G1/4 according below figure



P = Pressure outlet M14x1,5
 A = Inlet for electric cables Ø5...Ø10
 Mp = Manual pushbutton
 Gl = Green light

GE75 / X - 1 / X X X X



Tank capacity	X	Control system	X	X	Voltage	X	Monitoring system	X	Pump flow
2 litres	A	Without	0	0	0 24Vdc	1	MP LS PG PS GL	1	0,1 l/min
					1 115Vac	2			
					2 230Vac	3			
						4			

MP = Manual pushbutton
 LS = Level switch
 PG = Pressure gauge
 PS = Pressure switch
 GL = Green light


The green light is switched on only during the motor's running time

Lubrication unit for FLUID GREASE
NLGI 00-000
Single line system


GE75/B
3L Plastic

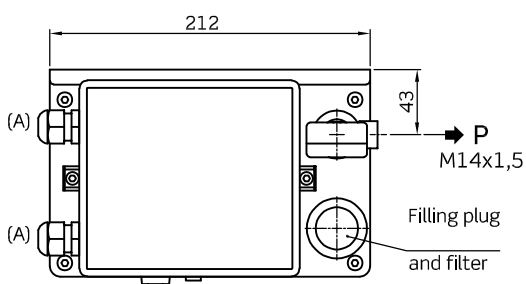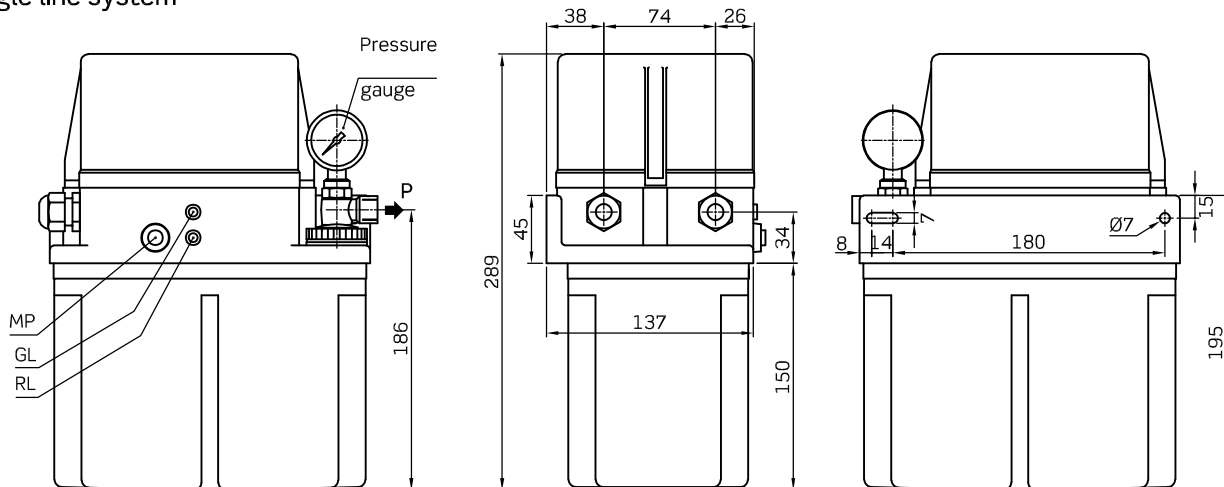

P = Pressure outlet M14x1,5
A = Inlet for electric cables Ø6...Ø12
MP = Manual pushbutton
GL = Green light
RL = Red light

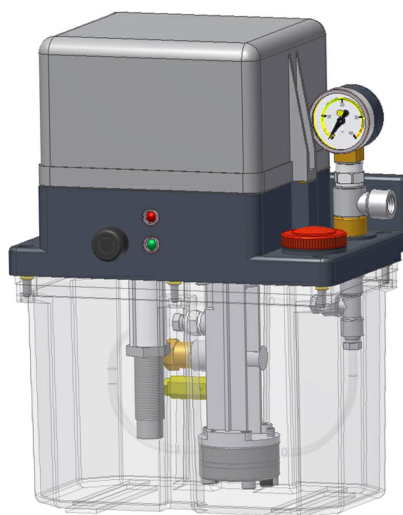

In units without pressure gauge, the outlet is G1/4 according below figure



GE75 / X - 1 / X X X X

Tank capacity	X	Control System	X	X	Voltage	X	Monitoring System						X	Pump flow	
							MP	LS	PG	PS	GL	RL			
3 litres	B	Without	0	0	24Vdc	1	✓				✓		2	0,2 l/min	
				1	115Vac	2	✓	✓			✓				
				3	230Vac	3	✓	✓	✓			✓			
				2	230Vac	4	✓	✓	✓	✓		✓			
	Time + pulses	7		0	0	24Vdc	5	✓	✓	✓	✓	✓	✓		
					1	115Vac									
					2	230Vac									

In the units without control the green light is switched on only during the motor's running time.
In the units with control the green light remains switched on while the unit is under voltage


MP = Manual pushbutton
LS = Level switch
PG = Pressure gauge
PS = Pressure switch
GL = Green light
RL = Red light

Connection plate for units without control



EF01/0-2

451060000

For application to connect the units' internal signals via the lower part with the control sources via the upper part.

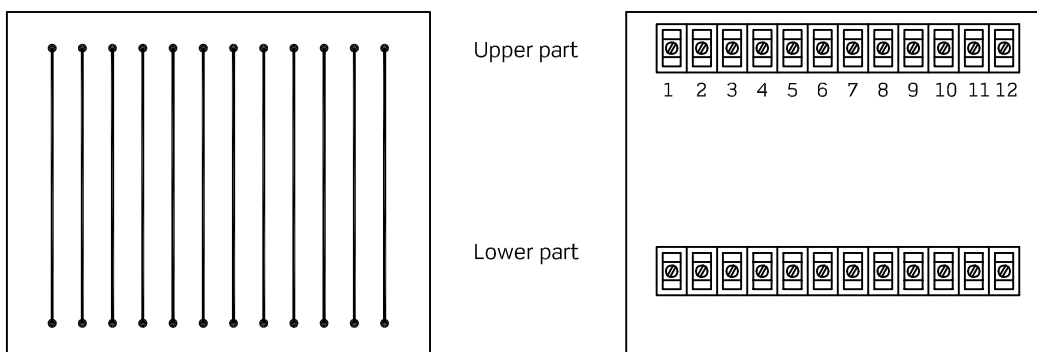

Electrical connection diagram

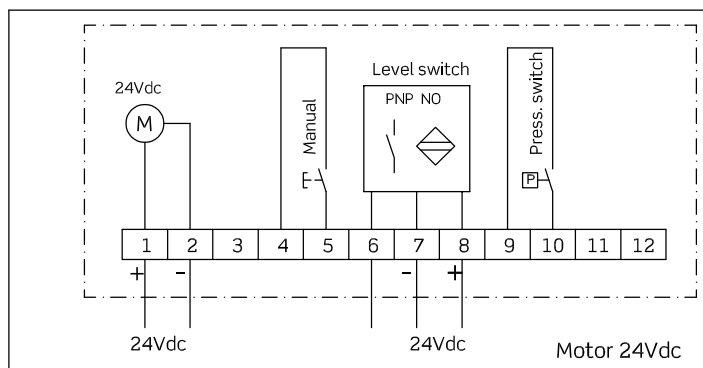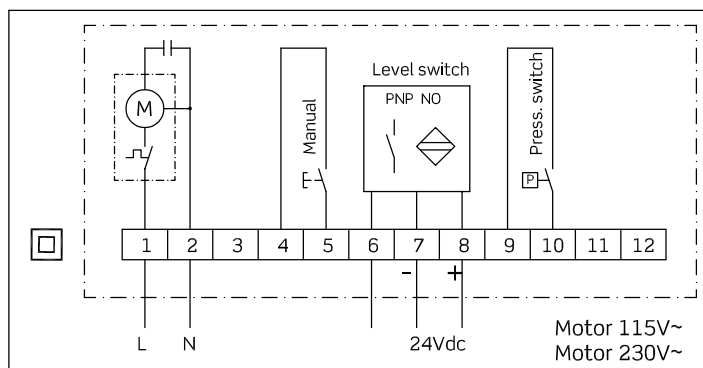

All the contacts on this diagram are indicated at rest position.

On the electrical level (tank without lubricant) the minimum level contact is open

Electrical level \Rightarrow Tank without lubricant

Pressure switch \Rightarrow Circuit without pressure

Manual pushbutton \Rightarrow Not pressed


Heat protector only incorporated in single-phase motors 115V~ and 230V~

If the current is cut as a result of abnormal overheating, this device is resetable (it is automatically reactivated when the temperature returns to normal), therefore, it is not necessary to carry out any work on the motor.



CAUTION!!!

Safety measures must be taken: disconnect the main switch before carrying out connection coupling.

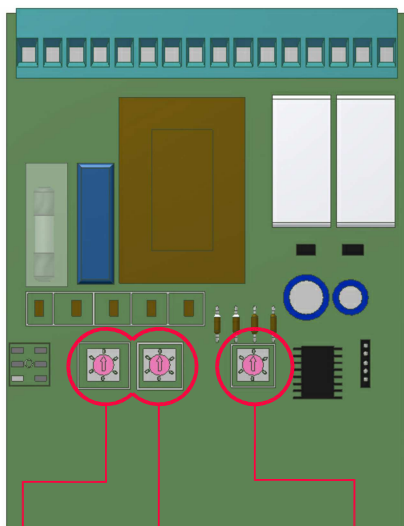

Control and Monitoring device

24Vdc ⇒ EE03/C-1-0
115V~ ⇒ EE03/C-1-1
230V~ ⇒ EE03/C-1-2


-TIME OR PULSES-

450.500.000

-PAUSE time programmable via the selector by time or pulses (electrical signals emitted during a machine's working rhythm)
-OPERATION time: pressure switch signal + 10 seconds.
Depends on the flow and number of points in the installation.
A maximum duration of 3 minutes has been set, after which the alarm will be activated.

Configuring the device:

- Select the desired pause mode via selector S3: Time / Pulses.
- Select the value of this pause via selectors S1 and S2 (Tens and Units)

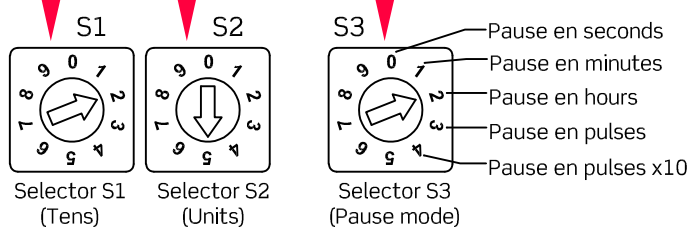


Application examples:

S1	S2	S3	One lubrication cycle every:
9	0	0	90 seconds
3	5	1	35 minutes
0	1	2	1 hour
8	0	3	80 pulses
7	5	4	75 pulses(x10)=750 pulses

Monitoring system

If the alarm is activated during start-up, the red led will light up indicating the relevant fault:

Type of alarm	Indicates	To cancel the fault
Fixed red led	1- Minimum level of oil in the tank 2- Level switch fault	-Fill the tank and press the manual pushbutton -Check the level switch
2 flashes of red led	Pressure fault (not enough pressure after motor in operation for 3 minutes)	-Check there are no leaks in the circuit -Check pressure switch status
3 flashes of red led	Device configuration fault	Check that -The pause mode selector is not out of range -The units and tens selectors are not at "0" at the same time

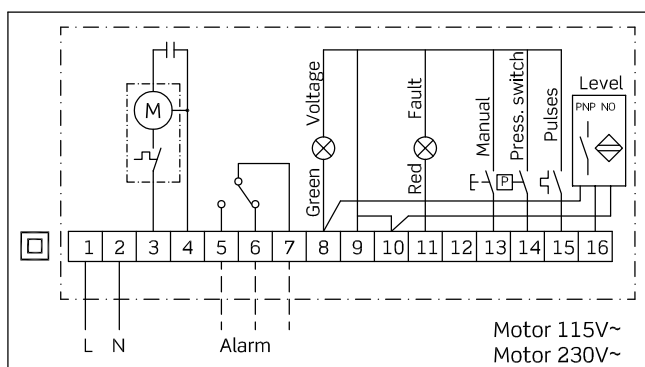

All the contacts on this diagram are indicated at rest position.

On the electrical level (tank without oil) the minimum level contact is open


Electrical level ⇒ Tank without oil

Pressure switch ⇒ Circuit without pressure

Manual pushbutton ⇒ Not pressed

Heat protector only incorporated in single-phase motors 115V~ and 230V~

If the current is cut as a result of abnormal overheating, this device is resetable (it is automatically reactivated when the temperature returns to normal), therefore, it is not necessary to carry out any work on the motor.

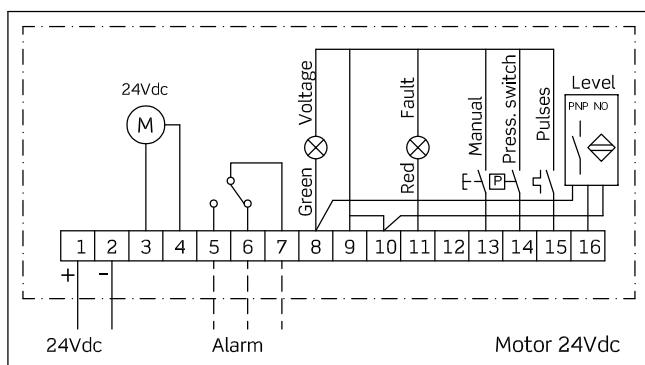

CAUTION!!!

Safety measures must be taken: disconnect the main switch before carrying out connection coupling.